

Linear Induction Motors with Modular Winding Primaries and Wound Rotor Secondaries

Eastham, Fred¹, Cox, Tom^{1,2}, Leonard, Paul¹, Proverbs, Jeff²

¹The University of Bath, Bath, United Kingdom

²Force Engineering, Shepshed, United Kingdom

Linear induction motors commonly use double layer windings, which produce good sinusoidal travelling fields, but have relatively bulky end windings and use either half-filled slots or overhanging coil sides at the ends of the machine. Long stator systems are difficult since it is not possible to butt stator modules against each other. Arguably the simplest and most cost effective winding uses modular construction where the coils are planar and do not overlap. Here the end winding is compact and stator sections can be butted together. However modular windings do not produce high quality travelling fields. Two space harmonics of closely the same magnitude are produced that travel in opposite directions, giving induced currents and opposing forces with little net force in plate rotors. The difficulty can be resolved if a wound secondary with a double layer winding is used instead of a plate. Here a substantial induced emf and current is produced only by the field for which the secondary is wound, so that force is produced only in one direction. The use and properties of modular windings for short rotor machines are explored using finite element analysis and the results are validated by practical tests. It is concluded that inexpensive modular windings can be used with wound secondaries to good effect particularly in long stator situations; for example, for electromagnetic launch and urban transport systems.

Index Terms-Linear induction motors, Wound rotors

I. INTRODUCTION

Linear induction motors commonly use conventional double-layer stator windings. These provide an excellent travelling field with little harmonic content. However when applied to linear stators they must use either half empty slots or coils that overlap at the ends of the stack. In addition the end windings at the sides of the machine tend to be bulky. Fig. 1 illustrates a stator using an 8 pole double-layer winding in 24 slots.

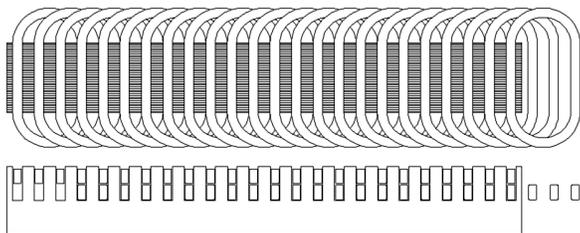


Fig. 1. 8 pole double layer winding layout

This uses half empty slots at one end and coils overlapping the stack end at the other. It is the objective of this work to use windings with non-overlapping planar coils. Following the nomenclature of [1] these are termed ‘concentrated’ if the older repeating coil sequence of R Y B is used and ‘modular’ if the newer winding sequences such as those given in [2] are used. Only modular windings are considered in this paper. An 8/10 pole 9 coil modular winding equivalent to that of Fig. 1 is illustrated in Fig. 2.

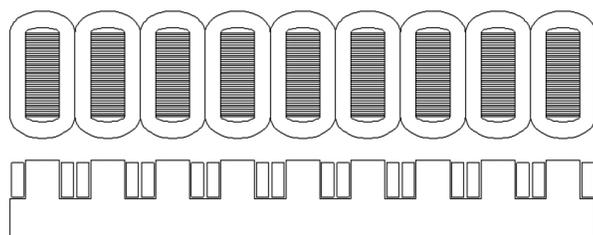


Fig. 2. 8 pole modular winding layout

Modular windings lead to machines that are inexpensive to wind, compact and that can be stacked end to end since no overlapping coils or half filled slots are needed. This is a particularly useful feature when long stators for EM launchers or urban transport schemes are considered.

II. THE USE OF MODULAR WINDINGS

There are two modular windings that are apt for use for long stator linear induction motors. The first of these uses nine coils and the second 12 coils. They have high winding factors and 14 poles or less so that they can be used to form compact separate stator blocks for use in modular stator constructions. The winding connection sequences for these two windings are as shown in table 1.

TABLE 1
COIL CONNECTIONS FOR TWO MODULAR WINDINGS

| Nine slot 8/10 pole modular winding | | | | | | | | | |
|-------------------------------------|---|----|---|---|----|---|---|----|---|
| Coil Number | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Coil phase & connection | R | -R | R | B | -B | B | Y | -Y | Y |

| Twelve slot 10/12 pole modular winding | | | | | | | | | | | | |
|--|---|----|----|---|---|----|----|---|---|----|----|----|
| Coil Number | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| Coil phase & connection | R | -R | -B | B | Y | -Y | -R | R | B | -B | -Y | Y |

Whilst modular windings are excellent mechanically they have the drawback of a high harmonic content in the mmf wave. In the table the nine slot winding is designated 8/10 poles because it produces two high mmf components of approximately equal value at 8 and 10 poles. These travel in opposite directions. Similarly the 12 slot winding produces high 10 and 14 pole harmonics.

The behaviour of the 9 slot winding is illustrated by Fig. 3 which shows the open circuit air gap flux produced by finite element analysis of a model using a stator of the form of Fig.

2. The 8 and 10 pole components of the wave are also shown on the figure. The two separate instants in a cycle are shown to illustrate that these main components travel in opposite directions.

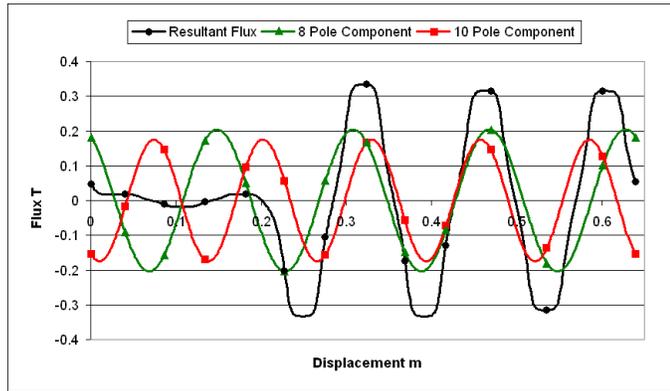


Fig. 3a. 9 coil stator air gap flux and harmonic components at 0°

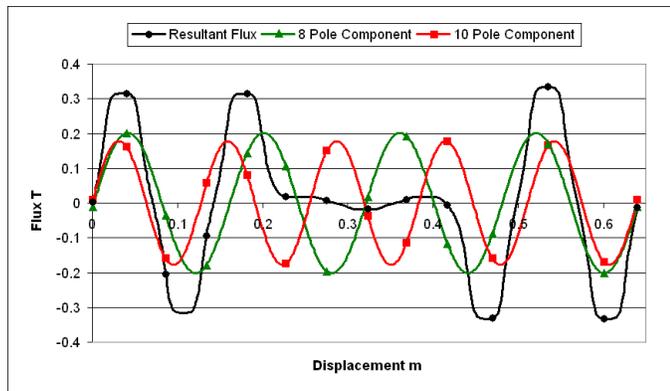


Fig. 3b. 9 coil stator air gap flux and harmonic components at 120°

Figures for the 12 slot winding corresponding to Table 1 appear as Fig. 4.

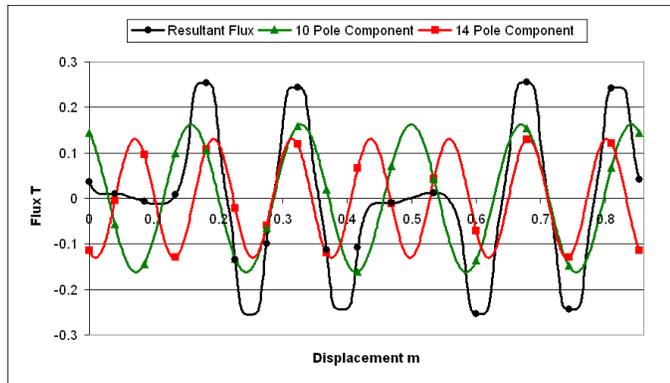


Fig. 4a. 12 coil stator air gap flux and harmonic components at 0°

The windings are typically in use for machines with permanent magnet excitation [1]. For both windings a magnet array can be provided to cooperate with either pole number of mmf to produce force; the second mmf wave then merely produces air-gap flux which gives extra leakage reactance.

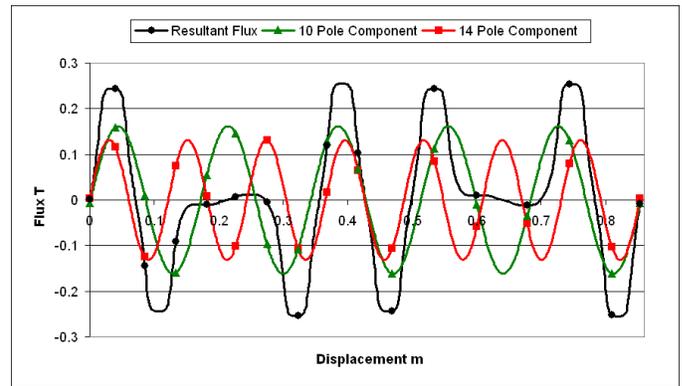


Fig. 4b. 12 coil stator air gap flux and harmonic components at 120°

If for example in the 9 slot case an 8 pole magnet array is chosen then net force will result only from the 8 pole mmf and the 10 pole mmf will only add reactance.

The situation is radically different for induction machines. If an inductive plate rotor is used then all the flux waves produce secondary eddy currents and force. For both windings the forces from the two oppositely directed high value harmonics oppose each other and the net force is severely reduced.

III. NEW PRINCIPLE

The situation can be improved by using a double layer wound secondary. This, like the permanent magnet secondary, will respond substantially only to the pole number for which it is wound since the winding factor controlling the induced emf is small except for the fundamental.

In order to avoid force perturbations due to magnetic locking the secondary slots can be skewed. Alternatively a solution which is simpler mechanically can be adopted, using a fractional slot winding so that the mutual slotting pattern repeats only in the secondary length.

The new principle of using a wound secondary so that simple modular primary windings may be used is described in the patent of [3].

IV. WOUND ROTOR ACTION

The wound rotor in the machine described above is used as a selector so that only one harmonic is effective. However wound rotors can improve the behaviour of linear motors apart from this effect [4].

The action of the wound rotor machine is different to that of the plate rotor machine because of edge effects. In a long stator arrangement the stator current is forced to be virtually constant by the impedance of the winding outside the active region. The flux density is therefore smaller inside the plate region where plate currents oppose the stator current than it is outside. As the edge of the plate moves between the flux densities in the two regions currents are induced at the plate edges that try to prevent the flux density change. These currents detract from the performance. Conversely in the wound rotor case since a series 3 phase set of coils take up position along the length of the secondary the winding current is the same along its length and there are no space transient effects.

V. ANALYTICAL RESULTS

Fig. 5 compares the response of an 8 pole short plate rotor first to a double layer winding with small harmonic content and secondly to the 9 coil modular winding described previously.

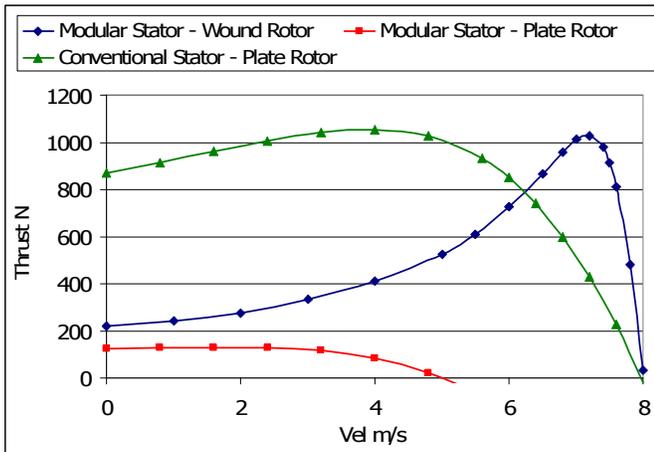


Fig. 5. Thrust speed curves for modular stator with both plate and wound rotors, and conventional stator with plate rotor

It will be seen that the plate rotor performs poorly with a modular wound stator due to the backward going harmonic. These results were obtained by time stepped FEA modelling using the MEGA package as detailed in the appendix. The results for a wound secondary are also shown in Fig. 5. Here the fractional slot 4 slot per pole winding using 3 slots pitched coils shown in Table 2 was used.

TABLE 2
COIL CONNECTIONS FOR THE WOUND ROTOR
8-pole 32 slot fractional slot rotor winding

| Coil Number | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|-------------------------|----|----|----|----|----|----|----|----|
| Coil phase & connection | R | R | -B | Y | -R | B | B | -Y |
| Coil Number | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| Coil phase & connection | R | -B | Y | Y | -R | -R | B | -Y |
| Coil Number | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| Coil phase & connection | R | -B | -B | Y | -R | B | -Y | -Y |
| Coil Number | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 |
| Coil phase & connection | R | R | -B | Y | -R | B | B | -Y |

The winding factors of each pole number for the rotor winding are shown in Fig. 6. The sign of the winding factor indicates direction of travel for each harmonic.

It can be seen that this rotor has a large 8 pole winding factor, with only very small winding factors for harmonics of other pole number, particularly the 10 pole harmonic, as this is the significant negative harmonic of the stator.

The response of the winding is excellent; the peak force is closely the same as when a double layer stator and plate rotor is used but the peak is closer to the synchronous speed and since secondary efficiency is given by $1/\text{slip}$ this indicates a much better secondary efficiency (92% compared to 52%).

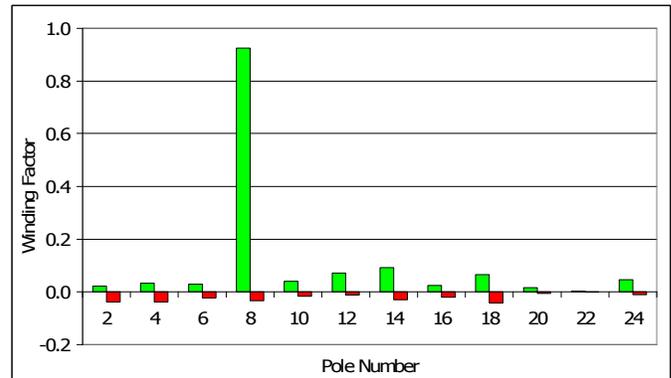


Fig 6. Winding factors of the wound rotor

Further comparisons can be drawn from Fig. 5 with regard to the performance of wound and plate rotor machines with short rotors. As argued previously the stator current is approximately constant in a short rotor induction motor. In this circumstance the peak of the force speed curve occurs at a slip of approximately R_2/X_m where R_2 is the referred secondary resistance and X_m is the magnetising reactance.

The force speed curve for the wound rotor has a high force low slip characteristic with a peak that implies that the ratio of R_2/X_m is low. Therefore the magnetising reactance is high and the rotor resistance is low. In contrast, the plate rotor shows a drooping characteristic indicating that the magnetising reactance is lower and the rotor resistance is higher. The difference in the characteristic of course follows from the physical arrangement. The magnetising reactance is governed by the inverse of the magnetic gap. This is small in the wound rotor case since it is set by the clearance. In contrast the magnetic gap is larger in the plate rotor machine since it is governed by the clearance plus the plate thickness. It follows that the magnetising reactance tends to be larger in wound rotor machines. The secondary resistance in the wound rotor case is set by such factors as the slot dimensions and can be arranged independently of the magnetising reactance and designed to be small. However in the plate rotor machine the secondary resistance and magnetising reactance are closely linked. For example if the plate thickness is increased to produce a lower resistance the magnetic gap is also increased reducing the magnetising reactance. This tends to keep the ratio of R to X_m the same and it is difficult to change the shape of the force speed curve. It follows that the wound rotor machine will always have a design advantage and be more easily arranged to have a low peak slip high peak efficiency characteristic.

VI. AN EXPERIMENTAL MACHINE

A test rig has been constructed to prove this principle using 9 slot 8/10 pole stator winding sections. This cooperates with a short wound rotor carrying the fractional slot double layer 8 pole winding described above. Tests were performed using the standstill variable frequency principle [5] to estimate the dynamic response of the system and the results are plotted on Fig. 7 for comparison with FE standstill variable frequency results. It will be observed that the correlation is excellent.

VII. CONCLUSIONS

The work has shown by time-stepped finite element modelling validated by experimental results that simple modular windings in which the coils do not overlap can be used for linear induction motor stators when wound rotors are employed. The new arrangement enables inexpensive stator modules to be used in EM launch and urban transport systems.

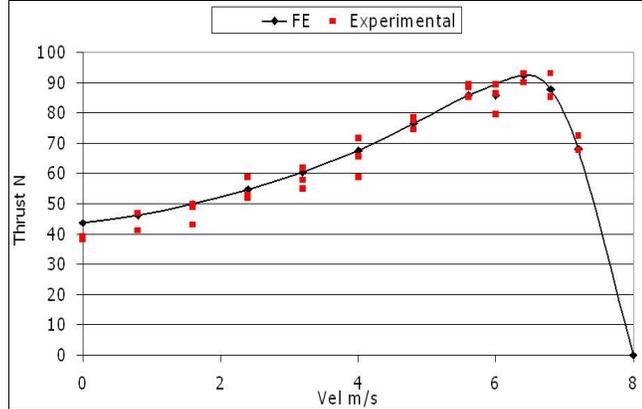


Fig. 7. Wound rotor experimental and FE results

APPENDIX

FINITE ELEMENT MODELLING

The device was modeled using 2D finite elements using the University of Bath MEGA Finite Element package.

The governing field equation (not in the coil regions) is:

$$\nabla \times \frac{1}{\mu} \nabla \times \mathbf{A} + \sigma \left(\frac{\partial \mathbf{A}}{\partial t} - \mathbf{E}_r \right) = 0 \quad (1)$$

$$\int \sigma \mathbf{E}_r \cdot d\mathbf{S} = 0 \quad (2)$$

where:

μ is the permeability in henries/meter.

\mathbf{A} is the magnetic vector field potential in Webbbers/meter.

σ is the conductivity in Siemens/meter.

\mathbf{E}_r is the additional field (a single unknown) in the rotor plate required to constrain the total current to zero.

In the coil regions, the governing equation is:

$$\nabla \times \frac{1}{\mu} \nabla \times \mathbf{A} - I_c t_c = 0 \quad (3)$$

$$L \int t_c \frac{\partial \mathbf{A}}{\partial t} dS - V_c = 0 \quad (4)$$

where:

I_c is the unknown current in each filament of the coil c in amps

t_c is the turns density of the coil

V_c is the voltage across the coil in volts

L is the length of the machine (into the page) in meters

This approach allows the coils to be connected to external circuits using the unknowns I_c and V_c [6]. In this case the stator currents were prescribed sinusoids. Each rotor coil becomes 2 regions (in and out flowing current). These coil regions were joined together appropriately. The movement of the rotor was modeled by a special sliding surface FEA scheme. In this arrangement, the stator and rotor of the motor are represented by separate meshes joined by the interface.

Due to symmetry in the plate model case only a half of the machine needs to be modeled i.e. one stator and a half of the plate secondary. The common interface was located at the middle of the clearance gap between the rotor surface and the adjacent stator surface of the half model. In the wound rotor case this symmetry does not exist. A view of the stator and rotor mesh for the wound rotor case is shown in Fig. 8.

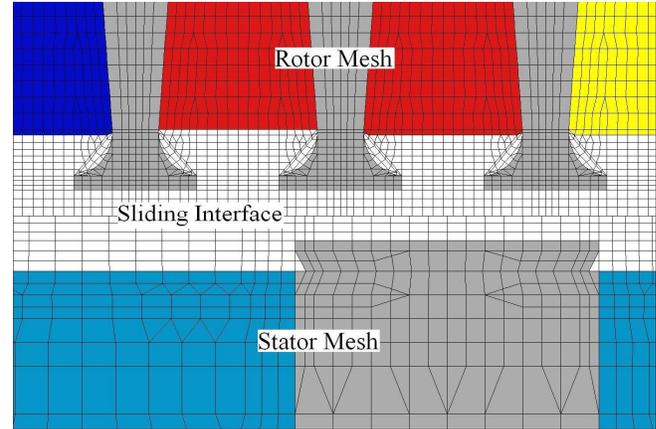


Fig. 8. A finite element mesh

The stator and rotor mesh can slide freely relative to each other along the interface and in so doing enable the dynamic motion of the rotor to be handled without the need of any re-meshing.

A further improvement to the 2D finite element modeling comes from the use of the Russell & Norsworthy Factor to modify rotor resistivity in order to simulate the secondary end ring effects present in the practical case [7].

The relative motion of rotor means that the field is no longer harmonic in time. The motor was simulated using a full time transient non linear solver.

ACKNOWLEDGMENT

This work was undertaken as part of a Knowledge Transfer Partnership supported by the UK Government Technology Strategy Board.

REFERENCES

- [1] J Wang, Z P Xia, D Howe, S A Long, "Comparative Study of 3-Phase Permanent Magnet Brushless Machines with Concentrated, Distributed and Modular Windings", PEMD 06, Mar. 2006, pp 489-493
- [2] Libert F., Soulard J., "Investigation on Pole-Slot Combinations for Permanent-Magnet Machines with Concentrated Windings", ICEM 04, Sep. 2004
- [3] J F Eastham, Force Engineering Patent "Improvements in and relating to Electromotive Machines" International Patent Application No PCT/GB2007/003849
- [4] S Yamamura, H Ito "End Effect of a Linear Induction Motor of the Wound Secondary Type" Report 434 of the General Meeting, IEEJ Japan, 1971 Yamamura
- [5] J F Eastham, P C Coles, M Benarous, J Proverbs, A Foster "Linear Induction Motor Variable Frequency Standstill Tests to Predict Operational Velocity Performance", LDIA 03, Sep. 2003, pp 81-84
- [6] Leonard, P.J., Rodger, D., Lai, H.C., Norton, M., Hill-Cottingham, R.J., "Coupling FE with power electronics and rotor dynamics of motors; Current Trends in the Use of Finite Elements (FE) in Electromechanical Design and Analysis", (Ref. No. 2000/013), IEE Seminar on 14 Jan. 2000 Page(s):6/1 - 6/6
- [7] Russell, R.L. and Norsworthy, K H. "Eddy Current and Wall Losses in Screened Rotor Induction Motors" Proc. I.E.E. Paper No. 2525 U, Apr 1958 (105 A, 163)